



Ulisse Wall Outlets

Available finishes

Polished chrome.

Assembly

Ulisse wall outlets' assembly includes:

- Outlet
- Flange
- Water saving aerator

Cleaning

Polished Chrome - Clean with warm soapy water, or non acidic, mild detergent and a soft cloth. Finish by cleaning off detergents with a soft wet cloth and towel dry.


Additional information and recommended fittings

Ulisse wall outlets are perfect for most vessels and baths, and are specifically designed to partner the Omvivo washplane® and basin collection. Each Ulisse outlet is rated 5* and uses approximately 5 litres per minute. To use with a bath simply remove the aerator and replace with a standard bath aerator. The wall outlet suits a standard ½" BSP threaded male fitting.

Important

This is not an installation guide.
Please contact OMVIVO for technical details.
Product specifications are subject to alteration without notice.

©OMVIVO Pty Ltd. 1997.

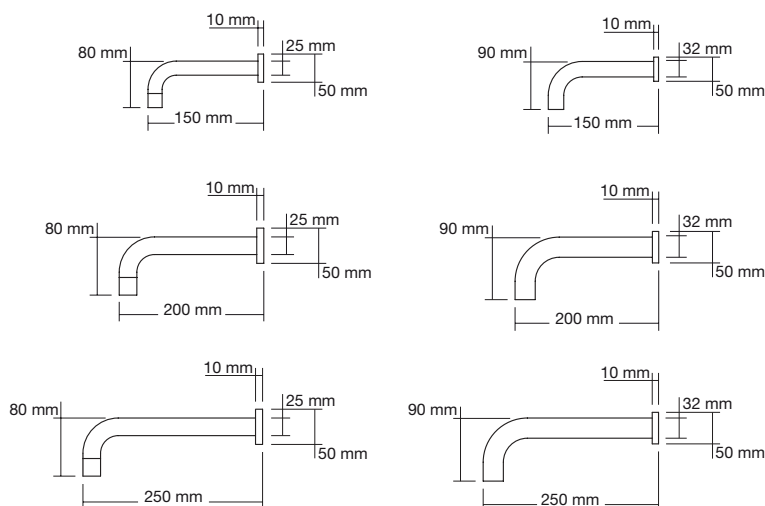

OMVIVO Pty Ltd Schiavello Complex T: + 61 3 9339 8130
1 Sharps Road Tullamarine F: + 61 3 9330 8611
Victoria Australia 3043 info@omvivo.com

www.omvivo.com

Note: due to varying manufacturing methods, the dimensions illustrated here are nominal and subject to change. Omvivo has detailed, to the best of its ability, the most approximate measurement possible for each product given the method of manufacturing used.